


XLPE POWER CABLES



AUSTRALIA PACIFIC ELECTRIC CABLES

**XLPE Insulated, PVC Sheathed,
Single core,
0.6 / 1 kV to AS/NZS 5000.1**

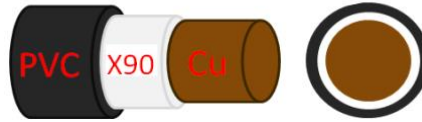

Conductor: annealed copper
Insulation: XLPE X90
Sheath: PVC 5V90
Compounds for continuous
conductor temperature of 90°C.

Standard Colours
Core: Natural
Sheath: Black

Nominal conductor area mm ²	Average Insulation thickness mm	Average Sheath thickness mm	Approx. overall diameter mm	Approx. mass kg/100m	Product Code
16	0.7	1.4	9.5	21.6	XV016C01
25	0.9	1.4	11.3	32.4	XV025C01
35	0.9	1.4	12.5	42.5	XV035C01
50	1	1.4	13.9	55.7	XV050C01
70	1.1	1.5	16	78.1	XV070C01
95	1.1	1.5	18.1	105.4	XV095C01
120	1.2	1.6	20.1	131.7	XV120C01
150	1.4	1.6	22.2	161.2	XV150C01
185	1.6	1.7	24.6	201.1	XV185C01
240	1.7	1.8	27.6	260.9	XV240C01
300	1.8	1.9	30.5	324.2	XV300C01
400	2.0	2.0	34.1	412.1	XV400C01
500	2.2	2.2	38	516.6	XV500C01
630	2.4	2.3	42.9	672.3	XV630C01

Brisbane Office and Factory

89 Platinum Street,
Crestmead, Qld 4132
P: 07 3802 3651
E: bnesales@apeccables.com.au

Melbourne Sales & Distribution

188 Holt Parade,
Thomastown, VIC 3074
P: 03 9465 1188
E: salesmdc@apeccables.com.au

Perth Sales & Distribution

638 Casella Place
Kewdale, WA 6105
P: 08 9350 1300
E: salespdc@apeccables.com.au