

# ALUMINIUM XLPE AERIAL BUNDLE




AUSTRALIA PACIFIC ELECTRIC CABLES

0.6 / 1 kV to AS/NZS 3560.1


**Conductor:** Aluminium

**Insulation:** XLPE X-90 UV  
Conductor temperature 90°C.

Two-core cable

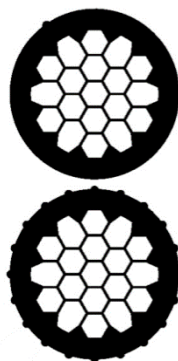

Four-core cable

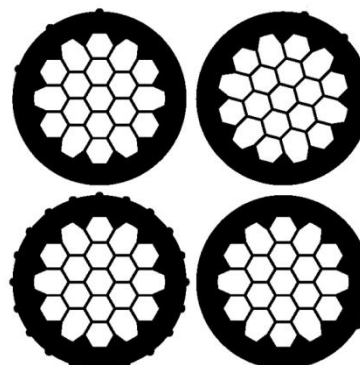

Nominal Conductor area mm <sup>2</sup>	Nominal Conductor diameter mm	Average Insulation thickness mm	Maximum overall diameter mm	Approx. Mass kg/100m	Product Code
<b>2 Core</b>					
16	4.8	1.3	15.8	14	ABC016A02
25	6.1	1.3	18.4	20	ABC025A02
95	11.9	1.7	31.8	68	ABC095A02
<b>4 Core</b>					
25	6.1	1.9	22.2	40	ABC025A04
35	7.2	1.9	24.9	52	ABC035A04
50	8.4	2.1	28.7	71	ABC050A04
70	10.1	2.1	32.8	97	ABC070A04
95	11.9	2.3	38.4	135	ABC095A04

**Brisbane Office and Factory**

89 Platinum Street,  
Crestmead, Qld 4132  
P: 07 3802 3651  
E: [bn-sales@apeccables.com.au](mailto:bn-sales@apeccables.com.au)

**Melbourne Sales & Distribution**

188 Holt Parade,  
Thomastown, VIC 3074  
P: 03 9465 1188  
E: [salesmdc@apeccables.com.au](mailto:salesmdc@apeccables.com.au)

**Perth Sales & Distribution**

638 Casella Place  
Kewdale, WA 6105  
P: 08 9350 1300  
E: [salespdc@apeccables.com.au](mailto:salespdc@apeccables.com.au)